

# KOLARC

BUILDING THE FUTURE



# KT400 W



# KT270 W



## TECHNICAL SPECIFICATIONS

Input Voltage  
Mains Voltage Tolerance  
Minimum Welding Current  
Maximum Welding Current  
TIG Duty Cycle, 40°C  
MMA Duty Cycle, 40°C  
Open – Circuit Voltage  
Weight  
Standard Accessories  
  
Dimensions (L, B, H)  
Certification

400 V  
- 10 % / + 15 %  
10 A  
400 A  
400 A %60 , 320A %100  
400 A %60 , 320A %100  
58 V - 75 V  
Liquid Cooled 65 kg  
3 m Power Cable ( 4 x 4 mm<sup>2</sup> )  
3 m Earth Clamp ( 50 mm<sup>2</sup> )  
Gas Hose (1.5 m)  
Torch, TX18 4m  
526mm x 825mm x 878mm  
CE

400 V  
- 10 % / + 15 %  
10 A  
270 A  
270 A %40, 230 A %60 , 200 A %100  
270 A %40, 230 A %60 , 200 A %100  
58 V - 75 V  
Liquid Cooled 65 kg  
4 m Power Cable ( 4 x 2.5 mm<sup>2</sup> )  
3 m Earth Clamp ( 35 mm<sup>2</sup> )  
Gas Hose (1.5 m)  
Torch, TX18 4m  
526mm x 825mm x 878mm  
CE

# KT220



230 V

- 10 % / + 15 %

10 A

220 A

220 A %35, 190 A %60 , 145 A %100

220 A %25, 140 A %60 , 105 A %100

58 V - 75 V

Air Cooled 25 kg

3m Power Cable ( 3 x 2.5 mm<sup>2</sup> )


3 m Earth Clamp ( 35 mm<sup>2</sup> )

Gas Hose (1.5 m)

Torch, TX26 4m

175mm x 310mm x 493mm


CE

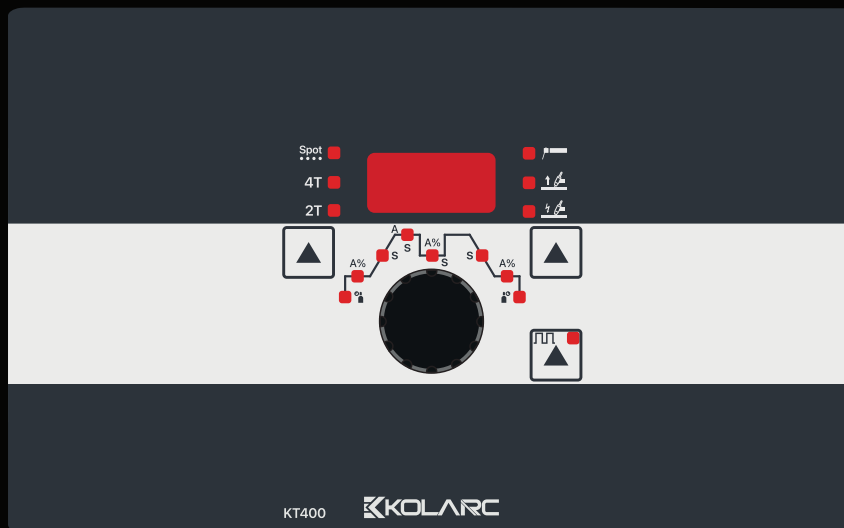

---

**Intuitive User Interface**



---

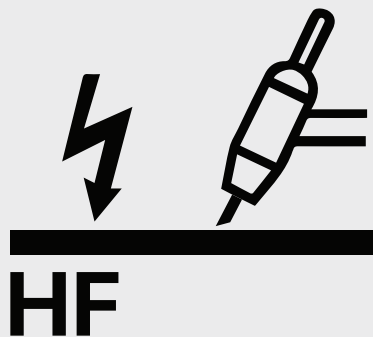

**Spot**

● ● ● ●

**4T / 2T**

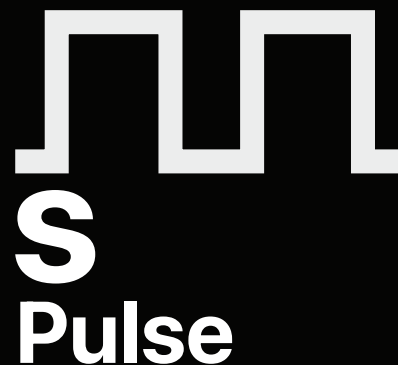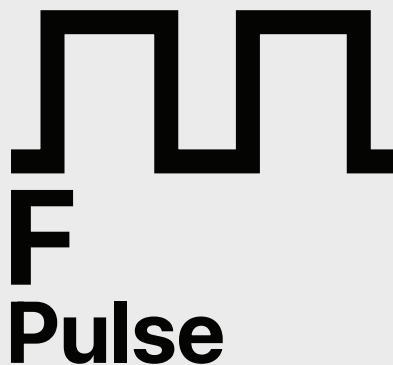

**IP23**

**Modular Design**



**Hot Start**

