

KOLARC

BUILDING THE FUTURE



Robotic Interfaces

Ethernet

Others



DeviceNet

EtherNet/IP

CANopen



EtherCAT



XT400 W
Pulse



XT270
Pulse



TECHNICAL SPECIFICATIONS

- Input Voltage
- Mains Voltage Tolerance
- Minimum Welding Current
- Maximum Welding Current
- TIG Duty Cycle, 40°C
- MMA Duty Cycle, 40°C
- Open – Circuit Voltage
- Weight
- Standard Accessories
- Dimensions (L, B, H)
- Certification

- 400 V
- 10 % / + 15 %
- 10 A
- 400 A
- 400 A %40, 360 A %60, 320A %100
- 400 A %40, 360 A %60, 320A %100
- 58 V - 75 V
- Liquid Cooled 42 kg
- 5 m Power Cable (4 x 4 mm²)
- 3 m Earth Clamp (50 mm²)
- Gas Hose (1.5 m)
- Torch, XT19 4m
- 532mm x 860mm x 974mm
- CE

- 400 V
- 10 % / + 15 %
- 10 A
- 270 A
- 270 A %40, 230 A %60, 200 A %100
- 270 A %40, 230 A %60, 200 A %100
- 58 V - 75 V
- Air Cooled 12 kg
- 5 m Power Cable (4 x 2.5 mm²)
- 3 m Earth Clamp (50 mm²)
- Gas Hose (1.5 m)
- Torch, XT27 4m
- 175mm x 310mm x 493mm
- CE

XT220

Pulse




230 V
 - 10 % / + 15 %
 10 A
 220 A
 220 A %40, 185 A %60, 160 A %100
 190 A %40, 150 A %60, 120 A %100
 58 V - 75 V
 Air Cooled 12 kg
 5 m Power Cable (4 x 2.5 mm²)
 3 m Earth Clamp (16 mm²)
 Gas Hose (1.5 m)
 Torch, XT27 4m
 175mm x 310mm x 493mm
 CE

XT200


Pulse




230 V
 - 10 % / + 15 %
 10 A
 200 A
 220 A %40, 185 A %60, 160 A %100
 190 A %40, 150 A %60, 120 A %100
 58 V - 75 V
 Air Cooled 12 kg
 5 m Power Cable (4 x 2.5 mm²)
 3 m Earth Clamp (16 mm²)
 Gas Hose (1.5 m)
 Torch, XT27 4m
 175mm x 310mm x 493mm
 CE

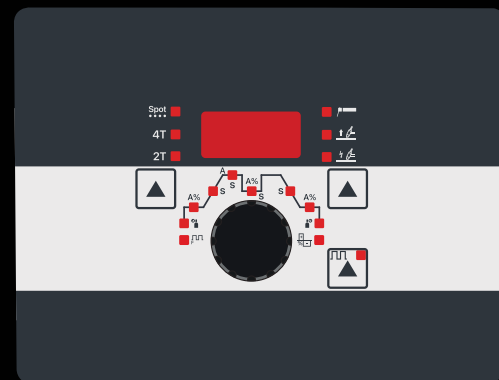



XT400

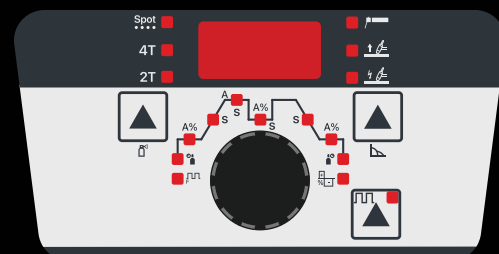



XT220-XT270



XT200

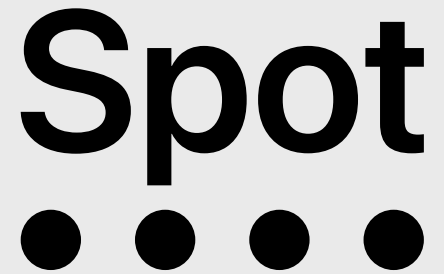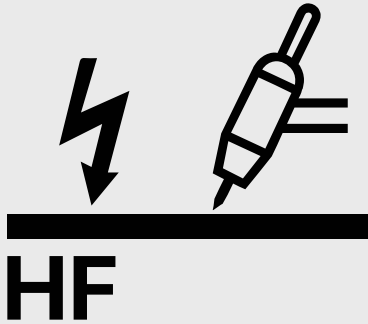

4T / 2T

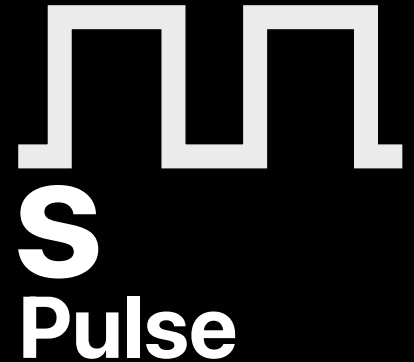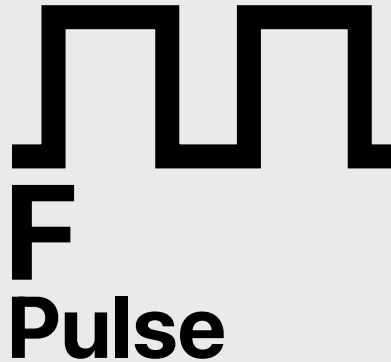

IP23

Modular Design



Hot Start

